


43.5 MIN (1105mm) MIN  
55.5 (1410) MAX  
SEAL POINT 30-42  
(762 - 1067mm) FROM FLOOR

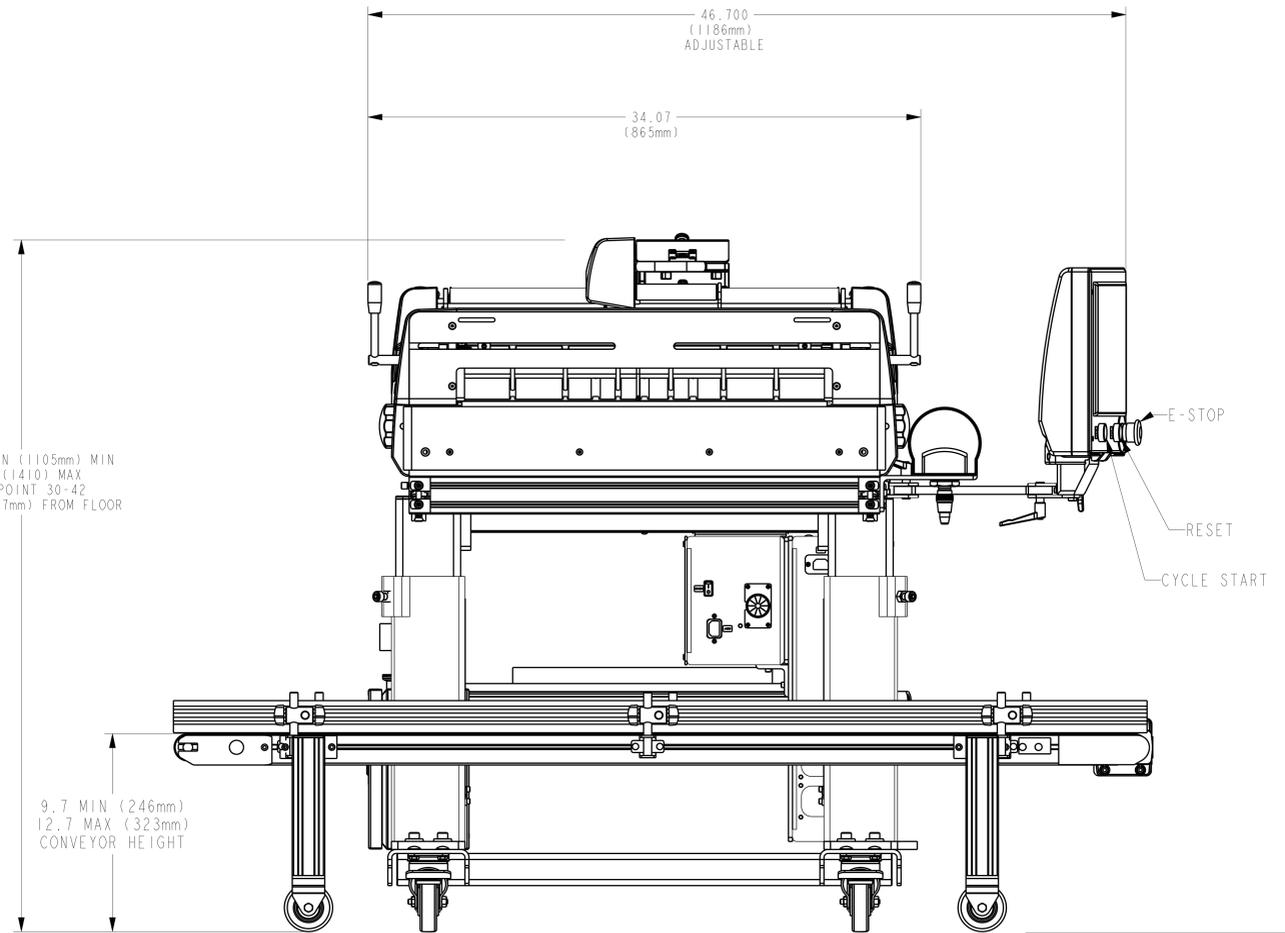

INCH [CM]

SPECIFICATIONS

ELECTRICAL	110/220VAC Switchable 50/60 Hz, 1800 Watts Continuous
PNEUMATIC	5 CFM @80 PSI, Clean Dry Air

FINISH	NONE															
MATERIAL	-															
REVISIONS	<table border="1"> <tr> <th>REV</th> <th>BY</th> <th>DATE</th> <th>ECN</th> <th>DESCRIPTION</th> </tr> <tr> <td>B</td> <td>GHW</td> <td>6-8-20</td> <td></td> <td>ADDED METRIC DIMENSIONS</td> </tr> <tr> <td>A</td> <td>DMT</td> <td>3-8-16</td> <td></td> <td>RELEASED</td> </tr> </table>	REV	BY	DATE	ECN	DESCRIPTION	B	GHW	6-8-20		ADDED METRIC DIMENSIONS	A	DMT	3-8-16		RELEASED
REV	BY	DATE	ECN	DESCRIPTION												
B	GHW	6-8-20		ADDED METRIC DIMENSIONS												
A	DMT	3-8-16		RELEASED												
DRAWING SIZE	E 1/4															
SCALE	1/4															
DATE	3-8-16															
NAME	DMT															
DRAWN BY	DMT															
CHECKED BY																
DATE	3-8-16															
REV																
DATE																
DESCRIPTION																



TITLE	LAYOUT, ABB50S, RIGHT-SIDE CONVEYOR
DRAWING NO.	FP218
SHEET 1 OF 1	REV.