

## Introducing the Autobag® 550™ Bagging System – Next generation bagging that optimizes flexibility for ecommerce order fulfillment, short-run, and build-on-demand operations

The Autobag® 550™ is a technologically-advanced, automatic filling and sealing machine designed for reliability, flexibility and optimizing packaging throughput. Capable of cycling at speeds up to 45 bags per minute, this system delivers maximum machine uptime while lowering total cost of ownership.

Next-bag-out printing is achieved with an advanced thermal transfer imprinter positioned directly over the next bag to be loaded. This ensures accuracy and efficiency in applications that require frequent product and label changeovers, prevents product queuing and eliminates a separate labeling operation.

State-of-the-art engineering has led to an inherently safe and flexible design. No light curtains or double palm switches are required to achieve safe hand-load operation. The Autobag 550 is configurable for left- or right-hand access to the HMI, cycle switch, and ribbon and bag loading areas, improving ergonomics and operator productivity. Plus, the Autobag 550 can be networked to facilitate full pack station integration and central monitoring. A 45 degree tilt option is available for orienting long or delicate products.

A straightforward, simple design with very few moving parts reduces lifetime cost and improves reliability, while on-board diagnostics and modular components simplify maintenance.

When used with genuine Autobag pre-opened bags-on-a-roll or bags-in-a-box if applicable, and AutoLabel Thermal Transfer Ribbon, the Autobag 550 ushers in the next evolution of high-quality, reliable and flexible bag packaging, backed by the industry's most comprehensive engineering and field service network.

### Markets Served

- Mail Order and ecommerce Fulfillment
- Prescription-by-mail Fulfillment
- Catalog Order Fulfillment
- Spare Parts Distribution
- Short-run production with frequent changeovers in any market



Next-bag-out printing prevents product queuing and reduces waste



Multi-position unwind with tension control simplifies changeover



AutoTouch™ Control Screen accesses operator tutorials, help system, on-board diagnostics, and performance monitoring



Newly designed bag sealer area combined with improved temperature control and optional seal-flatteners ensure consistent, high-quality seals

## Features and Benefits

### More Options

More bag size options; from 2" W x 2.5" L to 12" W x 20" L supported (36" long unsupported)

### Streamlined

Processor controlled servo motors, ethernet-capable networking, and flexible mechanical design streamline integration

### Compact

Compact footprint minimizes floor space

### Adjustable

Simple height adjustment and casters for operator comfort and portability

### Configuration Options

A 45 degree tilt option is available for orienting long or delicate products



### Flexible

Adjustable pass-through up to 5" for maximum flexibility and packaging efficiency



### Integration

Easily integrates with third-party systems for mail order fulfillment applications



### Serviceability

Modular components and dedicated service access simplify maintenance and repairs to maximize uptime



### System Matched Bags



### Service & Support




### Custom Engineering & Integration

## Optional Additions

- Handheld or Tabletop Bar Code Scanner
- Range of Infeed Funnels
- Seal Flatteners
- Raised Unwind
- SimpleCount™ Counting System
- Bags-in-a-box Adapter

## Technical Information

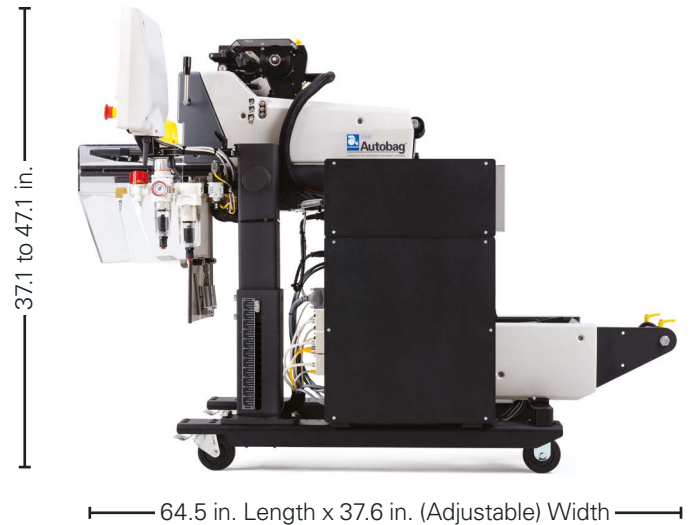

Weight	390 lbs.
Electrical	Universal Input: 110V to 240V VAC, 50/60 Hz Power Consumption: 1500 Watts (VA) max
Air Feed	5 CFM/80 psi of clean, dry air
Pass-Through	5 in. max
Bag Thickness	1.09 – 4.0 mil
Bag Sizes	W 2 to 12 in. L 5 to 20 in. (36 in. L unsupported)
Weight Capacity	Up to 5 lbs. (with load shelf)

888-AUTOBAG    info@autobag.com    autobag.com

Automated Packaging Systems Inc. 10175 Philipp Parkway, Streetsboro, Ohio 44241

© Sept 2018 Automated Packaging Systems. Features, Options & Technical Specifications subject to change. The use of the ® or ™ symbol indicates that Automated Packaging Systems, Inc. has registered or is otherwise claiming trademark rights in the United States. These marks may also be registered in other countries and common law rights may apply in countries where such rights are recognized. 09/18 2.5M

