

## Introducing the Autobag® 600™ Horizontal Wide Bagging System – Bringing flexibility, reliability and high productivity to large bag packaging applications

The Autobag® 600™ Horizontal is an automatic filling and sealing machine capable of running 16" wide bags, with a large load area for order prep and bulk product queuing, and a compact design that minimizes floor space. Developed for reliability, flexibility and optimizing packaging throughput, this system delivers maximum uptime while lowering total package cost.

Bagger features include:


- 24" conveyor boasts a generous open-space design, enabling unrestricted access and effortless transition onto secondary conveyance systems
- Simple machine design minimizes operator training requirements - perfect for high-turnover, seasonal labor
- Inherently safe and flexible design with no light curtains or double palm switches provide maximum operator protection

In addition to the above, the Autobag® 600™ Horizontal boasts many other technologically advanced functions. A multi-position unwind with tension control simplifies changeover. A straightforward, clean layout with very few moving parts reduces lifetime cost and improves reliability, while on-board diagnostics and modular components simplify maintenance. AutoTouch™ Control Screen accesses help system, on-board diagnostics, and performance data.

When used with genuine Autobag pre-opened bags-on-a-roll or bags-in-a-box, the Autobag 600 Horizontal ushers in the next evolution of high-quality, reliable and flexible wide bag packaging, backed by the industry's most comprehensive engineering and field service network.

### Markets Served

- Apparel and Accessory Packaging
- Kitting
- PPE and Medical
- Appliance Parts



24" open-space conveyor provides unrestricted access and effortless transition onto secondary conveyance systems



Advanced sealing technology and temperature control ensure consistent, high-quality seals



16" wide bag loading area is ideal for large or bulk products



Large load area for order prep and bulk product queuing



Multi-position unwind with tension control simplifies changeover

## Features and Benefits

### Streamlined

Processor controlled servo motors, ethernet-capable networking, and flexible mechanical design streamline integration

### Compact

Compact footprint minimizes floor space

### Flexible

Adjustable pass-through up to 6" for maximum flexibility and packaging efficiency



### Configuration Options

Load direction configurable for left- or right-hand operation



### Serviceability


Modular components and dedicated service access simplify maintenance and repairs to maximize uptime



## Optional Additions

- Built-in Tabletop Scale
- Bags-in-a-box Adapter

## Technical Information

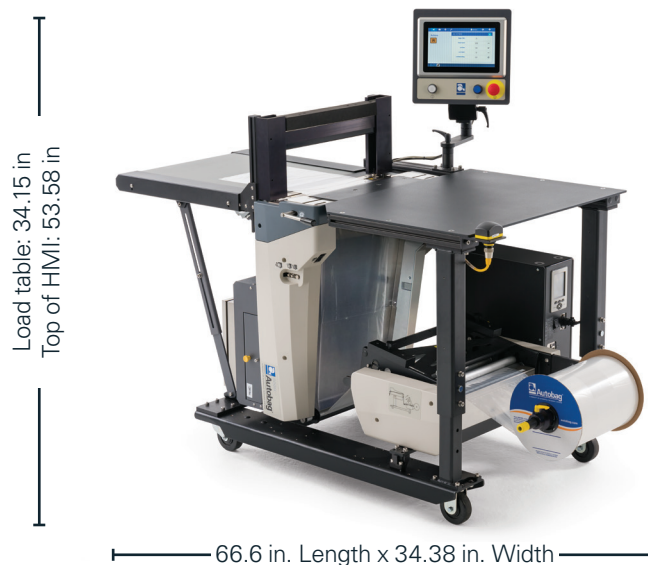

Weight	570 lbs.
Electrical	Universal Input: 110V to 240V VAC, 50/60 Hz Power Consumption: 750 Watts (VA) max
Air Feed	5 CFM/80 psi of clean, dry air
Pass-Through	6 in. max
Bag Thickness	1.09 – 4.0 mil
Bag Sizes	W 4 to 16 in. L 5.5 to 36 in.



**System Matched Bags**



**Service & Support**



**Custom Engineering & Integration**

888-AUTOBAG   info@autobag.com   autobag.com

Automated Packaging Systems, Inc. 10175 Philipp Parkway, Streetsboro, Ohio 44241

© September 2020 Automated Packaging Systems, Inc. Features, Options & Technical Specifications subject to change. The use of the ® or ™ symbol indicates that Automated Packaging Systems, Inc. has registered or is otherwise claiming trademark rights in the United States. These marks may also be registered in other countries and common law rights may apply in countries where such rights are recognized.

**Automated**  
PACKAGING SYSTEMS  
NOW PART OF **Sealed Air**